



HEATING AND COOLING SOLUTIONS

DUCTED SYSTEMS





THE BEST AIR ANYWHERE

At Daikin, we're not just in the business of air conditioners. We're in the business of human comfort. Our passion for designing and engineering smart technologies ensures your comfort levels are maximised.

Daikin is recognised as an expert in air conditioning. As specialists, air conditioning is all we do. In fact, we're the only company in the world to make both air conditioners and refrigerants which enables us to deliver air conditioning solutions that are world leading in performance, quality and reliability.

CONTENTS

DAIKIN DUCTED AIR	4
DAIKIN TECHNOLOGY	6
PREMIUM INVERTER DUCTED	8
INVERTER DUCTED	9
FBQ SLIM-LINE DUCTED	10
FDXS BULKHEAD SYSTEM	11
DAIKIN AIRBASE	12
CONTROLLERS	14
WHY CHOOSE A DAIKIN DEALER?	16
PRODUCT SPECIFICATIONS	18
FEATURES AND BENEFITS	25


DAIKIN DUCTED AIR

WHOLE HOUSE COMFORT

A Daikin ducted system provides discreet air conditioned comfort throughout your entire home. It can be installed in a new home or tailored to suit an existing one, and once installed, only the controller, the return air and discharge grilles are visible inside your home.

A Daikin ducted air conditioner consists of an indoor and outdoor unit and flexible ducting. The indoor unit is concealed out of sight in your ceiling or under the floor, with flexible ducting distributing conditioned air through vents located throughout your home. An outdoor unit is positioned in a discreet location outside your home.

DAIKIN DUCTED AIR CONDITIONING AT A GLANCE

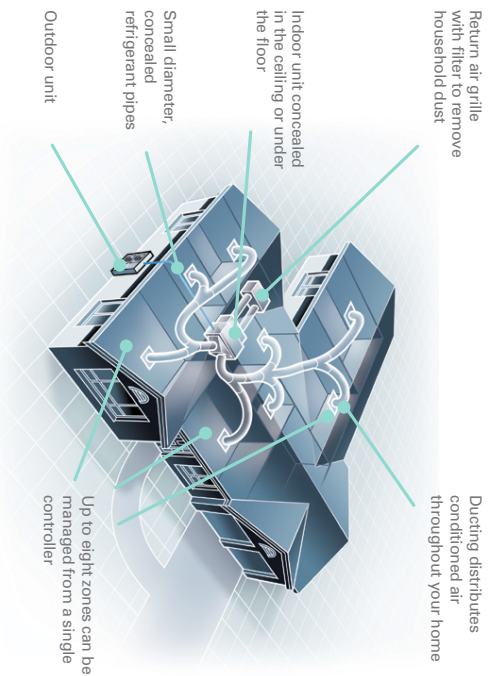

TRUSTED NAME

DAIKIN DUCTED MORE FOR YOUR MONEY

FLEXIBLE ZONING OPTIONS FOR YOUR HOME

Daikin ducted air conditioning gives you the flexibility to heat or cool every room in your home. Your home can be 'zoned' to maximise energy efficiency and comfort. For example, you may want the bedrooms in zone one, the living areas in zone two and so on. The position of discharge grilles can also be tailored to suit the shape of each room, for optimum air circulation.

LOCAL AFTER SALES SERVICE AND SUPPORT

Daikin has an established Service Department including an in-house call centre, spare parts division and support centre for all technical enquiries.

DAIKIN EXCEEDS MEPS ENERGY EFFICIENCY REQUIREMENTS

In the interests of increasing the overall air conditioning efficiency, all ducted air conditioners with a cooling capacity of up to 65kW sold in Australia or New Zealand must now comply with the Minimum Energy Performance Standards (MEPS), as set out in Australian and New Zealand Standard 3823.2:2013.

All Daikin air conditioners exceed MEPS requirements, in line with Daikin's commitment to providing energy efficient, quiet, simple to use and reliable air conditioning solutions.

AUSTRALIAN MADE CERTIFICATION

Through our commitment to expand local manufacturing capability, Daikin Australia are proud to say that our ducted indoor units* are now Australian Made certified.

A registered certification trademark, Australian Made logo is Australia's most trusted, recognised and widely used country of origin symbol, and is underpinned by a third-party accreditation system, which ensures products that carry the logo are certified as 'genuinely Australian'.


Registered products ensure premium quality and has met the criteria set out in the Australian Consumer Law and Australian Made, Australian Grown (AMAG) logo Code of Practice.

*Premium Inverter and Inverter range




DAIKIN TECHNOLOGY

INDOOR UNIT

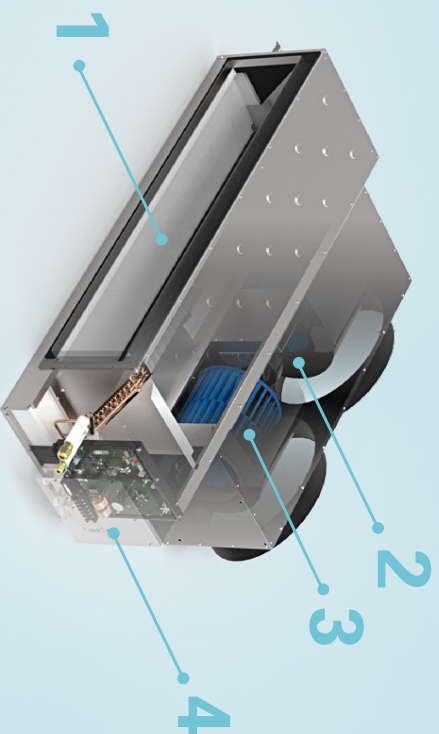


For over 90 years, Daikin has invested heavily in Research and Development to deliver more effective climate control for you and your family. Daikin technologies help make Daikin air conditioners energy efficient, powerful, reliable and easy to use.

OUTDOOR UNIT

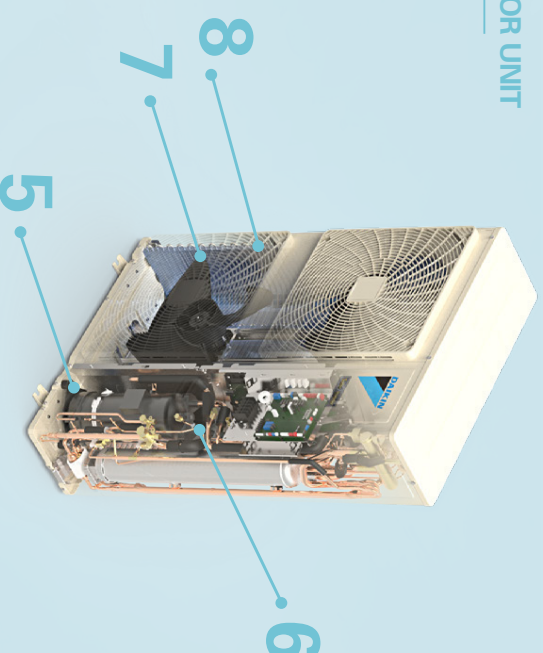

1. INDOOR HEAT EXCHANGER

Our new indoor heat exchangers have been designed to deliver maximum capacity output in a compact casing size. Through the use of cutting edge technologies, our indoor heat exchangers utilise Ø5mm copper pipes to ensure heat is removed from your home efficiently.



2. DC FAN MOTOR

Daikin indoor units are equipped with a high efficiency DC fan motor. By utilising high power permanent magnets instead of the induced magnetism of conventional AC motors, Daikin's DC motor can deliver significantly higher motor efficiency.



3. SIROCCO FAN

Daikin's ducted units are fitted with light weight single injection moulded Sirocco Fans. These fans feature an aerodynamic fan blade design which reduces turbulence for a more efficient and quieter airflow delivery.




4. PMV CONTROL

In automatic mode, Predicted Mean Vote control measures indoor and outdoor temperatures to calculate the ideal room temperature. As conditions change throughout the day, PMV Control gently adjusts your room temperature, maintaining an optimum balance between efficiency and comfort.

5. INVERTER COMPRESSOR

Daikin's swing and scroll DC sine wave inverter compressors are quieter and more efficient than conventional compressors, thanks to their high pressure dome construction and the usage of high pressure lubrication oil.



6. RELUCTANCE DC MOTOR

Daikin's Reluctance DC motor utilises the magnetic torque of neodymium magnets in conjunction with reluctance torque, resulting in more energy efficient operation. These neodymium magnets are 10 times stronger than conventional ferrite magnets.



7. SAW EDGE FAN BLADE

The addition of a saw tooth edge at the rear of the blade smooths air flow over the blade surface, reducing turbulence which in turn results in a quieter, more efficient means of delivering comfort to your home.




8. CROSS-PASS HEAT EXCHANGER

Daikin's Cross-Pass Heat Exchanger crosses refrigerant flows from two directions, reducing temperature hot-spots for more efficient operation and enhanced performance compared to single pass heat exchangers.



PREMIUM INVERTER DUCTED

Engineered to deliver superior energy performance, design flexibility and R22 retrofit capability. The new Premium Inverter range is perfect for your home or commercial application.

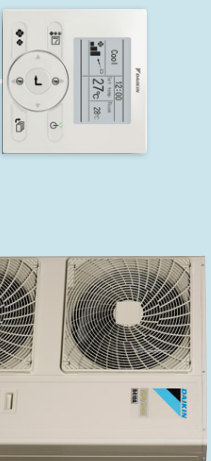

14 SINGLE +
THREE

MODELS PHASE OPTIONS

CAPACITY RANGE
5.1kW
-10 -
24.0kW

SUPERIOR ENERGY PERFORMANCE

Daikin's new Premium Inverter Series takes energy efficiency to the next level. Engineered with features such as a redesigned Cross-Pass Heat Exchanger on the outdoor unit, DC Fan motor on the indoor unit and improved refrigerant control technology. The new Premium Inverter range showcases industry leading energy performance.

DESIGN FLEXIBILITY

Our Premium Inverter systems allow a maximum piping length of up to 150m* and are pre-charged to 30m**. These units are also equipped with a DC Fan motor on the indoor unit with up to 15 different fan speed settings that can be enabled through a field code from your BRCT1E63 controller. These features and others are designed to enable flexibility in applying these products into various domestic and commercial applications.

R22 RETROFIT CAPABILITY

The new Premium Inverter range can be retrofitted onto an existing R22 system by simply replacing both the indoor and outdoor units whilst retaining the field piping intact*. This allows for a convenient and cost effective means of upgrading an existing system that may be at the end of its useful operating life.

AUSTRALIAN MADE


Premium Inverter ducted indoor units are specifically designed and manufactured in Sydney, NSW to perform in Australian conditions.



The Airbase Smartphone Interface is an optional accessory that allows you to control your Daikin Ducted System from anywhere, anytime.

INVERTER DUCTED

Engineered to deliver a compact and efficient design, the new Inverter series is ideal for installation into the tight roof space of any modern home.

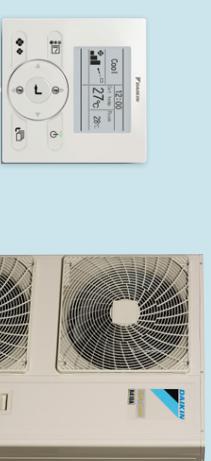

8 SINGLE +
THREE

MODELS PHASE OPTIONS

CAPACITY RANGE
7.1kW
-10 -
23.5kW

IMPROVED ENERGY EFFICIENCY

The improved energy efficiencies of the Inverter series have been achieved through the use of a DC Fan motor on the indoor unit and a Cross-Pass Heat Exchanger on the outdoor unit. Pipe sizes on the outdoor heat exchanger coil have been reduced and the number of passes increased in order to improve the capacity output and efficiency of the system.

COMPACT SIZE

The Inverter series outdoor units are more compact than ever before. Models up to 200 Class are now encased in a space saving side discharge outdoor unit, allowing you to place the unit in more versatile configurations (i.e. side access of your house) and not compromise the external appearance of your home.

FAN SETTINGS

The DC Fan motor on the indoor unit is designed to enable up to 15 different fan speed settings selectable through a field code on the BRCT1E63 controller to match the airflow to your ductwork configuration.

AUSTRALIAN MADE

Inverter ducted indoor units are specifically designed and manufactured in Sydney, NSW to perform in Australian conditions.



The Airbase Smartphone Interface is an optional accessory that allows you to control your Daikin Ducted System from anywhere, anytime.

FBA SLIMLINE DUCTED



COMPACT DESIGN

The new and improved FBA series has been designed to meet the construction challenges of modern commercial and medium density apartment development.

R32 REFRIGERANT

R32 is the next generation in refrigerants with a substantially lower 'Global Warming Potential Factor' than R410A, providing less risk of harm to the environment.

SUPERIOR DESIGN

With an industry leading compact size (245mm height), DC Fan on the indoor unit with an ESP of 150Pa and a built-in condensate pump with a lift of up to 850mm, the new and improved FBA unit is ideal for applications with tight ceiling spaces. The 75m (100 Class) pipe run also enables greater flexibility in the placement of the outdoor unit.

AUTOMATIC AIRFLOW ADJUSTMENT

Commissioning has never been easier. Automatic Airflow Adjustment feature allows the fan speed to adjust automatically to suit your duct design during commissioning, simplifying the process and saving time.

**15 SINGLE +
THREE**



MODELS PHASE OPTIONS

Optional accessory

CAPACITY RANGE
5.0kW
- TO -
14.0kW

CAPACITY RANGE
2.4kW
- TO -
6.0kW



FDXS BULKHEAD SYSTEM



EFFICIENT & DISCREET

The FDXS Bulkhead range is the ideal choice for air conditioning areas where a discreet installation is preferred.

The indoor unit fits flush into the ceiling with only the suction air and discharge grilles visible inside your home and leaving maximum floor and wall space for furniture, decoration and fittings.

COMPACT AND LIGHTWEIGHT

The compact form factor and light weight of the FDXS Series makes it suitable for a variety of applications with limited installation space while also being easy to handle during installation.

QUIET OPERATION

The FDXS Series is truly discrete with whisper quiet operations (35cBdA on the FDXS 25 Class) to ensure limited impact to internal room acoustics.

4 SINGLE

MODELS PHASE




DAIKIN AIRBASE

CONTROL AT YOUR FINGERTIPS

Daikin Airbase puts your ducted system's frequently used functions at your fingertip with an easy to use app.

In conjunction with Daikin's BRP15B61 wireless LAN adaptor, the Airbase app lets you use your smartphone or tablet* to operate your air conditioning unit via your in-home Wi-Fi or remotely with an internet connection.

Up to 10 systems** can be conveniently monitored and controlled on the app anywhere, anytime.



FEATURES

FUNCTION	DUCTED WITH NAV EASE	DUCTED WITH ZONE CONTROLLER
Start/Stop Operation	✓	✓
Temperature Setting	✓	✓
Fan Speed Settings	✓	✓
Mode Selection (Cool/Heat/Fan/Dry)	✓	✓
Zone On/Off	✗	✓
24 Hour On/Off Timer	✓	✓
Enter Zone Names	✗	✓
Error Notification	✓	✓
Room Temperature Display	✓	✓
Filter Clean Reminder	✓	✓
Push Notification (On/Off Alerts)	✓	✓
Automatic Adaptor Firmware Update	✓	✓
Setup Wizard in App	✓	✓

Operation Mode Theming




Home

Push Notification

On/Off Timer

Zone Control

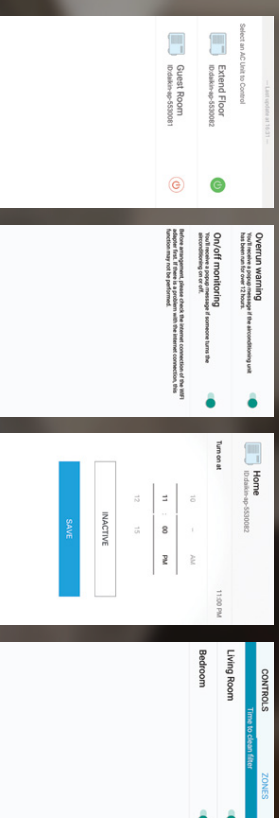

THREE WAYS TO CONNECT

1. DIRECT CONNECTION


For locations without a Wi-Fi network, the app can wirelessly connect directly to a WLAN adaptor equipped air conditioner, when in range.

2. Wi-Fi CONNECTION

A WLAN adaptor equipped air conditioner can easily be joined to a local Wi-Fi network. Once connected, the system can be controlled from any networked Android or iOS device.

3. INTERNET CONNECTION

Monitor and control your system from virtually anywhere, adjusting temperature and setting for a comfortable environment ready for when you arrive home. With no subscription costs from Daikin, all you need is a permanent internet connection for your Wi-Fi network, and an internet connection for your phone or tablet.

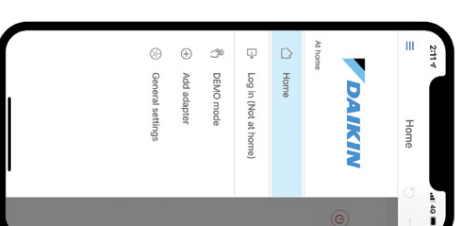

*Only compatible with Android (>5.0) & iOS (>8.0) devices
**Each ducted system requires a BRP15B61 adaptor & must be connected on the same Wi-Fi network

At Daikin, we have a range of controllers available to control your ducted air conditioning system to suit your lifestyle needs.

CONTROL YOUR DAIKIN

NAV EASE CONTROLLER

FEATURES

1. Clear, backlit display with easy-to-read text.
2. Weekly schedule timer, to program on and off times.
3. Home Leave function can turn your air conditioner on automatically when room temperatures drop below 10°C.
4. Quick Cool / Heat mode, which temporarily increases air conditioning power to more rapidly reach your desired operating temperature, before automatically returning to normal operation.
5. Set Temperature Mode Changeover, automatically switches from a cooling to heating cycle, or a heating to cooling cycle at pre-set points.
6. Temperature Limit, to predefine a temperature range for cooling or heating cycles, helping you reduce your energy consumption.



(Included with Premium Inverter Ducted and Inverter Ducted models)

NAV EASE MODEL NO.: BRC1E83

SPECIFICATION

HxWxD (mm)	120x120x19
Screen (Diagonal)	3.33"

TIP Need a second controller?
Daikin Airbase is a great option!

Airbase compatible

ZONE CONTROLLER

FEATURES

1. Backlit display with easy-to-read text.
2. Three different timer and time clock operations for precise, programmable control for your home.
3. Countdown On-Off timer, programmable in 1 hour increments for up to 12 hours.
4. A simple 7-day Time Clock, to program the controller to turn the system on or off at set times any day of the week. Two different on and off programs can be set for each day of the week.
5. An advanced 7-day Time Clock extends the functionality of the Simple 7-day Time Clock with advanced features such as Zone Control and Temperature Sensor Selection, for the ultimate in-home comfort.
6. Airside Control when connected with Premium Inverter Ducted models.



WHAT IS AIRSIDE CONTROL?

Daikin's Airside Control feature delivers conditioned air to your nominated zones more efficiently than ever before. With the typical home divided into separate areas or 'zones', it makes sense to only air-condition zones that are occupied and to switch unoccupied zones off.

Airside Control takes this one step further, as zones are turned off, the indoor unit fan reduces speed automatically to meet the airflow requirement of the remaining open zones. This action results in comfort where required, quieter operation and greater energy savings.

This feature is only available on Premium Inverted Ducted paired with the Zone Controller.



(Optional upgrade with Premium Inverter Ducted and Inverter Ducted models)

ZONE CONTROLLER MODEL NO.:

BRC23024A	Up to four zones (230-240V)
BRC23028A	Up to eight zones (230-240V)
BRC2424A	Up to four zones (24V)
BRC2428A	Up to eight zones (24V)

SPECIFICATION

HxWxD (mm)	120x170x24
Screen (Diagonal)	3.17"

TIP Need a second controller?
Daikin Airbase is a great option!

Airbase compatible

WHY CHOOSE A DAIKIN SPECIALIST DEALER?

Like us, our Dealers are specialists. They know the ups and downs, ins and outs of air conditioning. So their expertise ensures you get the right advice for your needs.

Daikin Specialist Dealers provide custom designed solutions for your home through an in-home quotation. Dealers will not only supply and install the best possible air conditioning solution but will also provide ongoing maintenance to ensure peak efficient performance over the life of the system.



To take the stress out of air conditioning your home, speak to a Daikin Specialist Dealer. With over 450 Specialist Dealers across Australia, our specialists are ready to help you fit the right air conditioning solution for your home.




SPECIFICATIONS

PRODUCT SPECIFICATION

Premium Inverter - Single Phase








INDOOR UNIT		FDY050DY	FDY060DY	FDY071BY	FDY0100BY	FDY0125BY	FDY0140LC	FDY0160BY
OUTDOOR UNIT		RZ0S60AV1	RZ0S60AV1	RZ0S71AV1	RZ0S100AV1	RZ0S125AV1	RZ0S140AV1	RZ0S160AV1
Rated Capacity	Cool (kW)	5.1	6.0	7.1	10.0	12.5	14.0	16.0
	Heat (kW)	6.0	7.0	7.5	12.5	15.0	16.5	18.0
Capacity Range	Cool (kW)	3.2-5.6	3.2-6.0	3.2-8.0	5.0-11.2	5.7-14.0	6.2-15.5	7.3-16.3
	Heat (kW)	3.5-7.0	3.5-8.0	3.5-9.0	5.1-12.8	6.0-16.2	6.2-18.0	7.3-18.2
Power Input	Cool (kW)	1.5	1.71	2.05	2.69	3.68	4.13	4.92
	Heat (kW)	1.62	2.09	1.89	3.02	3.79	4.29	4.72
E.E.R./C.O.P	Cool/Heat	3.40/3.70	3.51/3.35	3.46/3.36	3.72/4.14	3.40/3.36	3.39/3.85	3.25/3.81
Airflow Rate (Rated)	l/s	370	400	566	800	840	1000	1120
Indoor Sound Level (H) @ 1.5m	dB(A)	44.4	45.2	41	44	45.5	46	48
Piping Length	(m)	50						
Indoor Fan Speeds		H/M/L						
Dimensions (HxWxD)	Indoor (mm)	300x1015x651	300x1090x653	360x1157x689	360x1400x699	430x1400x643		
	Outdoor (mm)	770x830x320	990x840x320		1430x940x320			
Weight	Indoor (kg)	35	35	40	44	59	62	62
	Outdoor (kg)	64	64	75	108	108	108	117
Power Supply	V/Hz	1 Phase, 220-240V, 50Hz						
Compressor Type		Hermetically Sealed Swing Type			Hermetically Sealed Scroll Type			
Refrigerant					R410A			
Pipe Sizes	Liquid (mm)	6.4 (Flared)			9.5 (Flared)			
	Gas (mm)	12.7 (Flared)			15.9 (Flared)			
Supply Air Opening	mm (HxW, Flange)	202x762	186x652	245x652	245x1152	315x1152		
Return Air Opening	mm (Oval)	1x400 (Oval)						
Outdoor Operating Range	Cool (°CDB)	-5 to 46						
	Heat (°CWB)	-15 to 16						
EPA Sound Power Level	dB(A)	66	66	69	69	-	-	-
Outdoor Sound Level (H) @ 1m	Pressure dB(A) (C/H)	48/50	50/52	53/55	54/56			57/59



Notes

1. The Rated Capacity, Power Input and Running Current are measured in accordance with AS/NZS 3823.1.2
- Cooling: Indoor temp. 27°CDB/19°CWB, Outdoor temp. 35°CDB/24°CWB
- Heating: Indoor temp. 20°CDB/15°CWB, Outdoor temp. 7°CDB/6°CWB
- ii. Indoor and outdoor sound levels are determined in an anechoic chamber and may differ once the unit is installed due to ambient conditions

PRODUCT SPECIFICATION

Premium Inverter - Three Phase






INDOOR UNIT	FDY0100LCV1	FDY0125LCV1	FDY0140LCV1	FDY0160LCV1	FDY0180LCV1	FDY0200LCV1	FDY0250LCV1
OUTDOOR UNIT	RZ0S100AV1	RZ0S125AV1	RZ0S140AV1	RZ0S160AV1	RZ0Y07TY	RZ0Y08TY	RZ0Y01TY
Rated Capacity	Cool (kW) Heat (kW)	10.0 12.5	12.5 15.0	14.0 16.5	16.0 18.0	20.0 22.4	24.0 26.8
Capacity Range	Cool (kW) Heat (kW)	5.0-11.2 5.1-12.8	5.7-14.0 6.0-16.2	6.2-15.5 6.2-18.0	7.3-16.3 7.3-18.2	10.8-20.4 12.0-22.4	15.0-24.0 16.8-26.8
Power Input (Rated)	Cool (kW) Heat (kW)	2.69 3.02	3.68 3.79	4.13 4.29	4.92 4.72	5.61 5.81	6.08 6.17
E.E.R./C.O.P	Cool/Heat	3.72/4.14	3.40/3.36	3.39/3.85	3.25/3.81	3.21/3.44	3.29/3.63
Airflow Rate (Rated)	l/s	800	840	1000	1120	1160	1200
Indoor Sound Level (H) @ 1.5m	dB(A)	44	45.5	46	48	45	44
Piping Length	(m)	75					
Indoor Fan Speeds		H/M/L					
Dimensions (HxWxD)	Indoor (mm) Outdoor (mm)	360x1157x689	360x1400x689	430x1400x643	470x1200x597	470x1400x597	
Weight	Indoor (kg) Outdoor (kg)	44 108	59 108	62 108	70 192	79 192	85 203
Power Supply	V/Hz	3 Phase, 380-415V, 50Hz					
Compressor Type		Hermetically Sealed Scroll Type					
Refrigerant		R410A					
Pipe Sizes	Liquid (mm) Gas (mm)	9.5 (Flare) 15.9 (Flare)		19.1 (Brazed) 22.2 (Brazed)		9.5 (Brazed) 19.1 (Brazed) 22.2 (Brazed)	
Supply Air Opening	mm (HxW, Flange)	245x682	245x1152	315x1152	350x818	350x1118	
Return Air Opening	mm (Oval)	2x400 (Oval)					
Outdoor Operating Range	Cool (°CDB) Heat (°CWB)	-5 to 46 -15 to 16		-5 to 49 -20 to 16			
EPA Sound Power Level	dB(A)	69	-	-	-	-	-
Outdoor Sound Level (H) @ 1m	Pressure dB(A) (C/H)	53/55	54/56	57/59	56/56	56/56	57/57

Notes

1. The Rated Capacity, Power Input and Running Current are measured in accordance with AS/NZS 3823.1.2
- Cooling: Indoor temp. 27°CDB/19°CWB, Outdoor temp. 35°CDB/24°CWB
- Heating: Indoor temp. 20°CDB/15°CWB, Outdoor temp. 7°CDB/6°CWB
- ii. Indoor and outdoor sound levels are determined in an anechoic chamber and may differ once the unit is installed due to ambient conditions

PRODUCT SPECIFICATION

Inverter - Single Phase

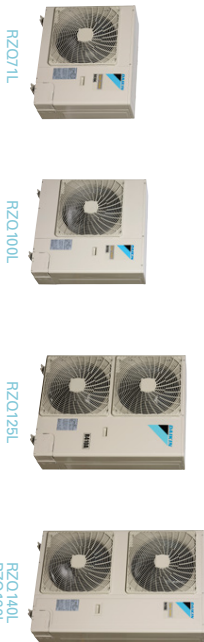


INDOOR UNIT	FDYON71LBV1	FDYON100LBV1	FDYON125LAV1	FDYON140LBV1	FDYON160LBV1
OUTDOOR UNIT	RZ010LV1	RZ010QLV1	RZ0100LV1	RZ0140LV1	RZ0160LV1
Rated Capacity	Cool (kW)	7.1	10.0	12.5	14.0
	Heat (kW)	7.5	12.5	15.0	16.5
Capacity Range	Cool (kW)	3.2-7.1	5.0-10.0	5.7-12.5	6.2-14.0
	Heat (kW)	3.5-7.5	5.1-12.5	6.0-15.0	6.2-16.5
Power Input (Rated)	Cool (kW)	2.25	3.12	4.14	4.65
	Heat (kW)	2.29	3.59	4.48	4.48
E.E.R./C.O.P	Cool/Heat	3.15/3.27	3.27/3.48	3.02/3.35	3.07/3.68
Airflow Rate (Rated)	l/s	566	800	840	1000
Indoor Sound Level (H) @ 1.5m	dB(A)	41	44	45	48.5
Piping Length	(m)	50		75	
Indoor Fan Speeds			H/M/L		
Dimensions (HxWxD)	Indoor (mm)	300x1090x83	360x1157x899	360x1488x899	
	Outdoor (mm)	770x930x320	990x940x320	1170x930x320	1430x940x320
Weight	Indoor (kg)	40	44	61	61
	Outdoor (kg)	64	75	98	108
Power Supply	V/Hz	1 Phase, 220-240V, 50Hz			
Compressor Type		Hermetically Sealed Swing Type	Hermetically Sealed Scroll Type		
Refrigerant Type			R410A		
Pipe Sizes	Liquid (mm)	9.5 (Flared)			
	Gas (mm)	15.9 (Flared)			
	Drain (mm)	ID 25 / OD 32			
Supply Air Opening	mm (HxW, Flange)	185x852	245x852	243x1152	
Return Air Opening	mm (Dval)	1x400 (Dval)		2x400 (Dval)	
Outdoor Operating Range	Cool (°CDB)	-5 to 46			
	Heat (°CWB)	-15 to 16			
EPA Sound Power Level	dB(A)	66	69	-	-
Outdoor Sound Level (H) @ 1m	Pressure dB(A)	49/51	51/53	54/56	57/59

Notes:

- i. The Rated Capacity, Power Input and Running Current are measured in accordance with AS/NZS 3823.1.2
Cooling: Indoor temp: 27°CDB/19°CWB, Outdoor temp: 35°CDB/24°CWB
Heating: Indoor temp: 20°CDB/15°CWB, Outdoor temp: 7°CDB/6°CWB
- ii. Indoor and outdoor sound levels are determined in an anechoic chamber and may differ once the unit is installed due to ambient conditions

PRODUCT SPECIFICATION

Inverter - Three Phase



INDOOR UNIT	FDYON180LC1			FDYON200LC1	FDYON250LB1
OUTDOOR UNIT	RZ0180MV1			RZ0200MV1	RZ0250LV1
Rated Capacity	Cool (kW)	18.0		19.5	23.5
	Heat (kW)	20.0		22.4	26.8
Capacity Range	Cool (kW)	9.0-18.0		10.1-19.5	15.0-23.5
	Heat (kW)	10.0-20.0		11.2-22.4	16.8-26.8
Power Input (Rated)	Cool (kW)	5.82		6.11	7.65
	Heat (kW)	6.11		6.85	8.47
E.E.R./C.O.P	Cool/Heat	3.09/3.27		3.19/3.27	2.99/3.16
Airflow Rate (Rated)	l/s	1180		1400	1400
Indoor Sound Level (1H @ 15m)	dB(A)	45		46	49.5
Piping Length	(m)			50	
Indoor Fan Speeds				H/M/L	
Dimensions (HxWxD)	Indoor (mm)	470x1200x997		470x1400x997	500x1430x970
	Outdoor (mm)		1430x940x220		1680x930x765
Weight	Indoor (kg)	70		85	92
	Outdoor (kg)	138		138	193
Power Supply	V/Hz		3 Phase, 415V, 50Hz		
Compressor Type			Hermetically Sealed Scroll Type		
Refrigerant Type			R410A		
Pipe Sizes	Liquid (mm)		9.5 (Brazed)		
	Gas (mm)		19.1 (Brazed)		
	Drain (mm)		BSP 3/4 inch Internal Thread		
Supply Air Opening	mm (HxW/Flange)	350x918		350x1118	376x338
Return Air Opening	mm (Oral)	393x918 (Flange)		383x1118 (Flange)	350x1118 (Flange)
Outdoor Operating Range	Cool (°CDB)		-5 to 43		
	Heat (°CWB)		-20 to 16		
EPA Sound Power Level	dB(A)	-		-	-
Outdoor Sound Level (1H @ 1m)	Pressure dB(A)	57/58		58/59	57/58

Notes:

- i. The Rated Capacity, Power Input and Running Current are measured in accordance with AS/NZS 3823.1.2
Cooling: Indoor temp: 27°CDB/19°CWB, Outdoor temp: 35°CDB/24°CWB
Heating: Indoor temp: 20°CDB/15°CWB, Outdoor temp: 7°CDB/6°CWB
- ii. Indoor and outdoor sound levels are determined in an anechoic chamber and may differ once the unit is installed due to ambient conditions

PRODUCT SPECIFICATION

FBA - Single Phase



SERIES		PREMIUM INVERTER								INVERTER			
INDOOR UNIT		FBA50BAYMA	FBA60BAYMA	FBA71BYMA	FBA85BYMA	FBA100BYMA	FBA125BYMA	FBA140BYMA		FBA71BYMA	FBA85BYMA		
OUTDOOR UNIT		RZAV50C1	RZAV60C1	RZAV71C1	RZAV85C1	RZAV100C1	RZAV125C1	RZAV140C1		RZAC71C1	RZAC85C1		
Rated Capacity	Cool (kW)	5.0	6.0	7.1	8.5	10.0	12.5	14.0		7.1	8.5		
	Heat (kW)	6.0	7.1	8.0	10.0	11.2	14.0	16.0		8.0	10.0		
Capacity Range	Cool (kW)	1.4-6.0	1.4-7.1	3.2-8.0	4.0-10.0	5.0-11.2	5.0-14.0	5.0-16.0		1.8-8.0	3.2-10.0		
	Heat (kW)	1.4-7.1	1.4-8.0	3.5-9.0	4.1-11.2	5.1-12.5	5.1-16.0	5.1-18.0		2.0-9.0	3.5-11.2		
Power Input (Rated)	Cool (kW)	1.37	1.67	2.02	2.30	2.72	3.68	4.08		2.15	2.64		
	Heat (kW)	1.41	1.71	1.99	2.50	2.81	3.72	4.51		2.30	2.95		
E.E.R.C.O.P (Rated)	C/H	3.65/4.26	3.60/4.14	3.51/4.02	3.70/4.00	3.68/3.99	3.40/3.76	3.43/3.55		3.30/3.47	3.22/3.39		
Airflow Rate (Rated)	l/s	300	300	383	533	533	600	600		383	533		
Indoor Sound Level (H) @ 1.5m	dB(A)	35	35	38	38	38	40	40		38	38		
Piping Length	m	50				75				50			
Indoor Fan Speeds						H/M/L							
Dimensions (HxWxD)	Indoor (mm)	245x1000x800				245x1400x800		245x1400x800		245x1400x800			
	Outdoor (mm)	595x845x300		990x940x220		1430x940x220		595x455x300		990x940x220			
Weight	Indoor (kg)	37	37	37	47	47	47	47		37	47		
	Outdoor (kg)	45	45	69	78	93	93	99		45	69		
Power Supply	V/Hz	1 Phase, 220-240V, 50Hz											
Compressor Type		Hermetically Sealed Swing Type											
Refrigerant		R32											
Pipe Sizes	Liquid (mm)	6.4 (Flared)				9.5 (Flared)							
	Gas (mm)	12.7 (Flared)				15.9 (Flared)							
Supply Air Opening	mm (HxW, Flange)	176x792				176x1192		176x1192		176x1192			
	Return Air Opening (HxW, Flange)	208x652				208x1352		208x1352		208x1352			
Outdoor Operating Range	Cool (°C/DB)	-5 to 50								-5 to 46			
	Heat (°C/WB)	-15 to 16											
EPA Sound Power Level	dB(A)	68	68	67	71	70	-	-		68	70		
Outdoor Sound Level (H) @ 1m (C/H)	Pressure dBA	48/51	48/51	48/50	52/53	51/53	52/54	56/58		48/51	51/54		

Notes:

- i. The Rated Capacity, Power Input and Running Current are measured in accordance with AS/NZS 3823.1.2
Cooling: Indoor temp: 27°C/DB/19°C/WB, Outdoor temp: 35°C/DB/24°C/WB
Heating: Indoor temp: 20°C/DB/15°C/WB, Outdoor temp: 7°C/DB/6°C/WB
ii. Indoor and outdoor sound levels are determined in an anechoic chamber and may differ once the unit is installed due to ambient conditions

PRODUCT SPECIFICATION

FBA - Three Phase



Series		Premium Inverter						Inverter		
Indoor Unit		FBA71BYMA	FBA85BYMA	FBA100BYMA	FBA125BYMA	FBA140BYMA	FBA85BYMA	FBA100BYMA	FBA85BYMA	
Outdoor Unit		RZAV71C1	RZAV85C1	RZAV100C1	RZAV125C1	RZAV140C1	RZAC71C1	RZAC85C1	RZAC95C1	
Rated Capacity	Cool (kW)	7.1	8.5	10.0	12.5	14.0		8.5		
	Heat (kW)	8.0	10.0	11.2	14.0	16.0		10.0		
Capacity Range	Cool (kW)	3.2-8.0	4.0-10.0	5.0-11.2	5.0-14.0	5.0-16.0		3.2-10.0		
	Heat (kW)	3.5-9.0	4.1-11.2	5.1-12.5	5.1-16.0	5.1-18.0		3.5-11.2		
Power Input (Rated)	Cool (kW)	2.02	2.30	2.72	3.68	4.08		2.64		
	Heat (kW)	1.99	2.50	2.81	3.72	4.51		2.95		
E.E.R.C.O.P	C/H	3.51/4.02	3.70/4.00	3.68/3.99	3.40/3.76	3.43/3.55		3.22/3.39		
Airflow Rate (Rated)	l/s	383	533	533	600	600		533		
Indoor Sound Level (H) @ 1.5m	dB(A)	38	38	38	40	40		38		
Piping Length	m	75								50
Indoor Fan Speeds		H/M/L								
Dimensions (HxWxD)	Indoor (mm)	245x1000x800			245x1400x800		990x940x220			
	Outdoor (mm)	990x940x220				1430x940x220				
Weight	Indoor (kg)	37	47	47	47	47		47		
	Outdoor (kg)	69	78	93	93	99		99	69	
Power Supply	V/Hz	3 Phase, 380-415V, 50Hz								
Compressor Type		Hermetically Sealed Swing Type								
Refrigerant		R32								
Pipe Sizes	Liquid (mm)	9.5 (Flared)				15.9 (Flared)				
	Gas (mm)	15.9 (Flared)				15.9 (Flared)				
Supply Air Opening	mm (HxW, Flange)	176x792				176x1192		176x1192		
	Return Air Opening (HxW, Flange)	208x652				208x1352		208x1352		
Outdoor Operating Range	Cool (°C/DB)	-5 to 50								-5 to 46
	Heat (°C/WB)	-15 to 16								
EPA Sound Power Level	dB(A)	67	71	70	-	-		70		
Outdoor Sound Level (H) @ 1m	Pressure dBA (C/H)	48/50	52/53	51/53	52/54	56/58		51/54		

Notes:

- i. The Rated Capacity, Power Input and Running Current are measured in accordance with AS/NZS 3823.1.2
Cooling: Indoor temp: 27°C/DB/19°C/WB, Outdoor temp: 35°C/DB/24°C/WB
Heating: Indoor temp: 20°C/DB/15°C/WB, Outdoor temp: 7°C/DB/6°C/WB
ii. Indoor and outdoor sound levels are determined in an anechoic chamber and may differ once the unit is installed due to ambient conditions

PRODUCT SPECIFICATION

FDXS - Single Phase



INDOOR UNIT		FDXS25LUMA		FDXS35LUMA		FDXS50LUMA		FDXS60LUMA	
OUTDOOR UNIT		RXS25LBVMA		RXS35LBVMA		RXS50LBVMA		RXS60LBVMA	
Rated Capacity	Cool (kW)	2.4		3.4		5.0		6.0	
	Heat (kW)	3.2		4.0		5.8		7.0	
Capacity Range	Cool (kW)	1.3-3.0		1.4-3.8		2.3-5.3		3.0-6.5	
	Heat (kW)	1.3-4.5		1.4-5.0		2.3-6.0		3.0-8.0	
Power Input (Rated)	Cool (kW)	0.69		1.03		1.5		1.91	
	Heat (kW)	0.91		1.14		1.72		2.17	
EER/COP	C/H	3.49/3.52		3.30/3.51		3.33/3.37		3.14/3.23	
Airflow Rate (Rated)	l/s	158		200		267		267	
Indoor Sound Level (H) @ 1.5m	dBA	35		37		38		38	
Piping Length	m	20				30			
Indoor Fan Speeds	5 Steps, Quiet and Automatic								
Dimensions (HxWxD)	Indoor (mm)	200x490x620				200x1100x620			
	Outdoor (mm)	550x755x265		770x900x320				990x640x320	
Weight	Indoor (kg)	25		27		30		30	
	Outdoor (kg)	34		34		71		80	
Power Supply	V/Hz	1 Phase 220-240V, 50Hz							
Compressor Type	Hermetically Sealed Swing Type								
Refrigerant	R410A								
Pipe Sizes	Liquid (mm)	6.4 (Flared)				9.5 (Flared)			
	Gas (mm)	9.5 (Flared)				15.9 (Flared)			
	Drain (mm)	ID 20 / OD 26							
Supply Air Opening	mm (HxW, Flange)	153x980				153x1080			
Return Air Opening	mm (HxW, Flange)	160x780				160x980			
Outdoor Operating Range	Cool (°CDB)			10 to 46					
	Heat (°CWB)			-15 to 18					
EPA Sound Power Level	dBA	62		63		65		68	
Outdoor Sound Level(H) @ 1m	Pressure dBA (C/H)	47/48		49/49		50/51		52/54	

Notes

i. The Rated Capacity, Power Input and Running Current are measured in accordance with AS/NZS 3823.1.2

Cooling: Indoor temp: 27°CDB/19°CWB, Outdoor temp: 35°CDB/24°CWB

Heating: Indoor temp: 20°CDB/15°CWB, Outdoor temp: 7°CDB/8°CWB

ii. Indoor and outdoor sound levels are determined in an anechoic chamber and may differ once the unit is installed due to ambient conditions

FEATURES AND BENEFITS

ENERGY EFFICIENCY

INVERTER OPERATION

An inverter system works like the accelerator of a car, gently increasing or decreasing power to steadily maintain your optimum temperature without fluctuations. That means uninterrupted comfort and significant savings on running costs. Daikin premium inverters can also reach your desired temperature faster than conventional air conditioners.

AUTOMATIC MODE CHANGEOVER

Automatically selects heating or cooling modes to suit thermostat settings and prevailing room temperature.

PREDICTED MEANVOTE (PMV) CONTROL

Measures indoor and outdoor temperatures to calculate the ideal room temperature, gently adjusting it for the optimum balance between efficiency and comfort.

TEMPERATURE LIMIT OPERATIONS

Lets you pre-define temperature range for cooling or heating, to reduce energy consumption.

HOME LEAVE

Ideal for cold climates, when activated, home leave turns your air conditioner on automatically when room temperatures drop below 10°C, keeping your home at or above 10°C so it never gets really cold.

AUTOMATIC FUNCTIONS

AUTO RESTART AFTER POWER FAILURE

The air conditioner memorises the settings for mode, airflow, temperature etc. and automatically returns to them when power is restored after a power failure.

SELF DIAGNOSTICS WITH DIGITAL DISPLAY

Malfunction codes are displayed on your control panel for fast, easy fault diagnosis and maintenance.

ANTI-CORROSION COATING

An anti-corrosion coating on outdoor heat exchangers gives greater resistance to salt damage and atmospheric corrosion.

COMPACT DESIGN

The compact design of Daikin ducted indoor units allows them to be installed in confined areas, and they can also be dismantled for easier installation in tight roof spaces.

COMFORT CONTROL

NIGHT QUIET MODE

Outdoor unit noise is automatically reduced by 3 dB when outdoor temperatures fall more than 6°C from the day's maximum (set during installation).

PROGRAM DRY MODE

In this mode, priority is given to reducing the level of humidity in the room rather than room temperature.

INTELLIGENT DEFROST

During heating operation in low ambient temperature conditions, frost can form on the outdoor unit heat exchanger which can reduce your air conditioner's performance. Daikin's intelligent defrost system constantly monitors a range of system parameters and temperatures to determine the optimum time to commence a defrost operation for maximum performance in cold conditions.

HOT START

Prior to heating, the indoor unit warms to a pre-set temperature before the fan switches on, ensuring only warm air is discharged and eliminating cold drafts.

QUICK COOL / HEAT – POWERFUL MODE

This feature temporarily increases power to more rapidly reach your desired room temperature, before automatically returning to normal operation.

TIMER CONTROL

24 HOUR ON/OFF/TIMER

This timer can be pre-set to start and stop at any time within a 24 hour period.

NIGHT SET MODE

A timer off circuit gradually adjusts pre-set cooling and heating levels, preventing sudden temperature changes during the night and improving economy.

SEVEN DAY/TIME CLOCK

This allows you to program your air conditioner to turn on or off at set times for every day of the week.

FEATURES
CHECKLIST

	PREMIUM INVERTER (95-160 CLASS)	PREMIUM INVERTER (180-250 CLASS)	SLIM-LINE	BULKHEAD	INVERTER (71-160 CLASS)	INVERTER (180-250 CLASS)
Inverter Operation	✓	✓	✓	✓	✓	✓
DC Indoor Fan Motor	✓	✓	✓	✓	✓	✓
Swing Compressor	✓ ¹		✓	✓	✓ ¹	
Scroll Compressor		✓			✓	✓
High Efficiency (H/X) Indoor Heat Exchanger Coil	✓	✓	✓	✓	✓	✓
Automatic Mode Changeover	✓	✓	✓	✓	✓	✓
P.M.V. Control	✓	✓	✓	✓	✓	✓
Temperature Limit Operations ⁴	✓	✓	✓	✓	✓	✓
Home Leave ⁴	✓	✓	✓	✓	✓	✓
Auto Restart After Power Failure	✓	✓	✓	✓	✓	✓
Self Diagnostics	✓	✓	✓	✓	✓	✓
Anti-Corrosion Coating for Outdoor Heat Exchanger	✓	✓	✓	✓	✓	✓
Indoor Unit Designed and Built in Australia	✓	✓			✓	✓
Long Piping Length	✓	✓	✓	✓	✓	✓
High Strength Galvanized Steel Casing	✓	✓	✓	✓	✓	✓
Night Quiet Mode ⁹	✓ ³	✓			✓	✓
Low Noise Operation ⁹	✓	✓	✓	✓	✓	✓
Program Dry Mode	✓	✓	✓	✓	✓	✓
Intelligent Defrost	✓	✓	✓	✓	✓	✓
Hot Start	✓	✓	✓	✓	✓	✓
Quick Cool / Heat – Powerful Mode	✓	✓	✓	✓	✓	✓
Automatic Fan Speed				✓		
Automatic Airflow Adjustment	✓ ⁵	✓	✓	✓	✓ ⁵	✓ ¹⁰
Indoor Fan Cycles with Compressor ⁷	✓	✓	✓		✓	✓
24 Hour On/Off Timer	✓	✓	✓		✓	✓
Night Set Mode ⁸			✓		✓	
Seven Day Time Clock	✓	✓	✓		✓	✓
Electronic Control System	✓	✓	✓	✓	✓	✓
Airside Control	✓ ⁶	✓ ⁶				✓
Wireless LAN Connection	✓ ⁷	✓ ⁷	✓ ⁷		✓ ⁷	✓ ⁷

1 FDV050-90DV1, FDV071LBV1 & FDV0N71LBV1 only – all others are scroll-type
2 Can be set up by installer during installation
3 Not available for FDV050-90DV1
4 Not available on Zone Controller
5 Available on FDV050-90DV1, FDV071-100LBV1 & FDV0N71-100LBV1 only
6 Only available on Zone Controller
7 Optional accessory & only compatible with New Ease or Zone Controller
8 Night Quiet and Night Set modes may reduce capacity
9 Low noise operation requires optional PCB
10 Only available on FDV0N180-200LCV1



© Copyright in the contents of this brochure is owned by Daikin Australia Pty Limited and no part of the document may be reproduced in any form without the express written permission of Daikin Australia Pty Limited.

ASSUMPTIONS

All representations made in Daikin marketing and promotional material are based on the assumptions that the correct equipment has been selected, appropriately sized and installed in accordance with Daikin's installation instructions and standard industry practices.

QUALITY CERTIFICATIONS

Daikin Industries Limited was the first air conditioning equipment manufacturer in Japan to receive ISO 9001 certification. All Daikin manufacturing facilities have been certified to ISO 9001 Quality Management System requirements. ISO 9001 is a certificate for quality assurance concerning 'design, development, manufacturing, installation and related service' of products manufactured at that factory.

AUSTRALIAN MADE CERTIFICATION

Through our commitment to expand local manufacturing capability, Daikin Australia are proud to say that our ducted indoor units* are now Australian Made certified.

Registered products ensure premium-quality and has met the criteria set out in the Australian Consumer Law and Australian Made, Australian Grown (AMAG) logo Code of Practice.

*Premium Inverter and Inverter range



Daikin Australia Pty Limited (ISO 9001)

QEC 23256 May 12, 2006
Sydney, Brisbane, Adelaide, Melbourne, Newcastle, Townsville, Perth



Daikin Australia Pty Limited (ISO 14001)

CEM 20437 October 27, 2006
Sydney, Brisbane, Adelaide, Melbourne, Perth



Residential Air Conditioning Manufacturing Div (ISO 9001)

JOA-0486 May 2, 1994
(Shiga Plant)

Commercial Air Conditioning and Refrigeration Manufacturing Div (ISO 9001)

JMI0107 December 28, 1992
(Kanaoka Factory and Rinkai Factory at Sakai Plant)

Industrial System and Chiller Products Manufacturing Div (ISO 9001)

JOA-0495 May 16, 1994
(Yodogawa Plant and Kanaoka Factory and Kishiwada Factory)

Daikin Europe N.V (ISO 9001)

Lloyd 928589.1 June 2, 1993

Daikin Industries (Thailand) Ltd (ISO 9001)

JOA-1452 September 13, 2002



ENVIRONMENTAL CERTIFICATIONS

Daikin Industries Limited has received ISO 14001 Environmental Certification for the Daikin production facilities listed below. ISO 14001 is an international standard specifying requirement for an environmental management system, enabling an organisation to formulate policy and objectives, taking into account legislative requirements and information about significant environmental impacts. It applies to those environmental aspects within the organisation's control and over which it can be expected to have an influence.

The certification relates only to the environmental management system and does not constitute any endorsement of the products shipped from the facility by the International Organisation for Standardisation.

Head Office /Tokyo Office
Shiga Plant (Japan)
Sakai Plant (Japan)
Daikin Industries Ltd (Thailand)
Yodogawa Plant (Japan)
Daikin Australia Pty. Ltd.

Certificate number: EC02J0355
Certificate number: EC99J2044
Certificate number: JOA-E-80009
Certificate number: JOA-E-90108
Certificate number: EC99J2057
Certificate number: CEM20437

CONTACT



Daikin Australia Pty Limited ABN 62 000 172 967

For all Sales enquiries, email: sales@daikin.com.au

For Customer Service or Technical Support, call: 1300 368 300

Stay Connected!     

Visit daikin.com.au